ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F005 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1042	A	RELEASED	HYO	10/10/01	JWM	12/27/01	DJC	1/3/02

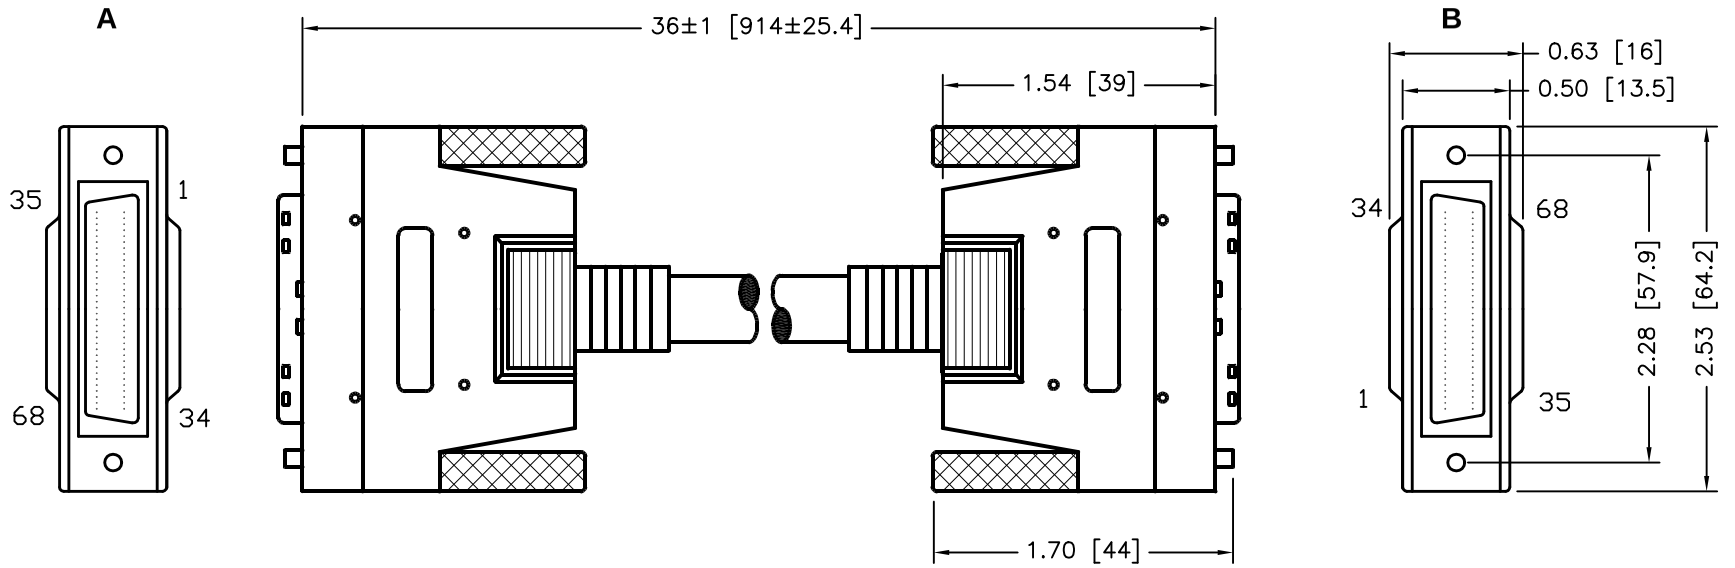

Typical Connector Dimensions

NOTES:

1.MOLDED CONNECTOR END REQUIREMENTS:
- A. INNER MOLD USING PE
- B. COPPER FOIL WRAP AND 360° SOLDER TO CONNECTOR
- C: PVC - 45P PLATINUM GRAY

2. CABLE:
- 28AWG (7/0.127), 34 PAIRS
- DRAIN WIRE (7/0.163)
- TIN BRAID SHIELD
- JACKET: 80°C PVC, OD= Ø10.0±0.20mm
- COLOR: PLATINUM GRAY

3. THUMBSCREW: 6*57mm, NICKEL PLATING
4. CONNECTORS:
- A & B) HALF-PITCH DB 68 MALE
  - NICKEL PLATING
  - INSULATION COLOR: BLACK

Pin Out

A --- B

Pin 1 --- Pin 1
Through
Pin 68 --- Pin 68
Shield --- Shield

SPC-F005.DWG

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
HISHAM ODISH	10/10/01
CHECKED BY:	DATE:
JEFF MCVICKER	12/27/01
APPROVED BY:	DATE:
DANIEL CAREY	1/3/02

SPC TECHNOLOGY

DRAWING TITLE: SCSI III SERIES CABLE, HPDB 68PIN MALE/MALE

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC10524	19C8381.DWG	A

SCALE: NTS | U.O.M.: INCHES [mm] | SHEET: 1 OF 1